


**maxiflex 50,5/400**  
**(164' - 13' uprights)**

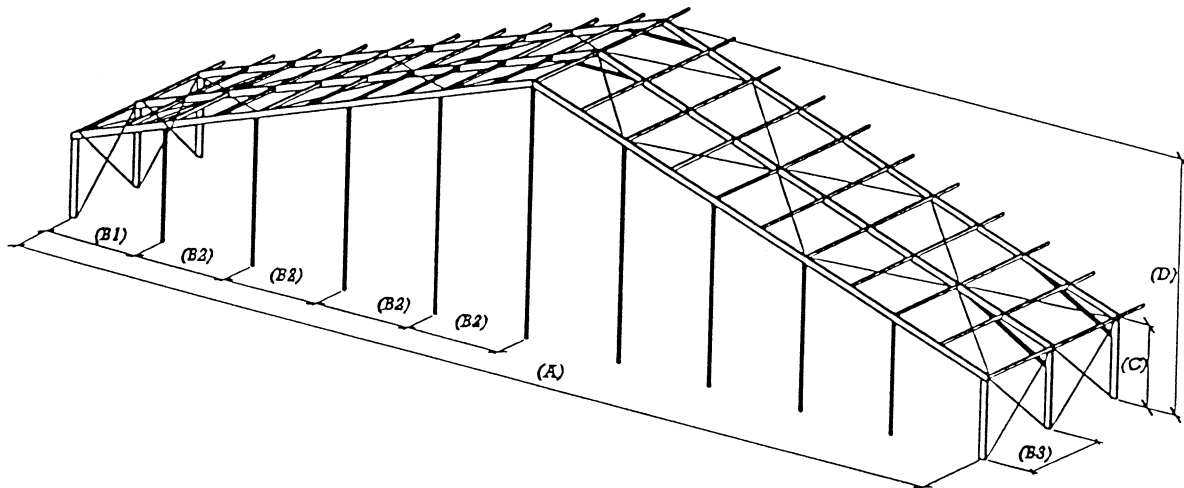

<b>A) Width:</b>	50.18 m (164' 7 9/16")
<b>C) Eave height:</b>	3.80 m (12' 5 5/8")
<b>D) Ridge height:</b>	11.95 m (39' 2 1/2")
<b>B1) Gable truss</b>	5.09m (16' 8 3/8")
<b>B2) Gable truss</b>	5.00m (16' 4 7/8")
<b>B3) Truss distance:</b>	5.00m (16' 4 7/8")
<b>Rafter profile:</b>	120 x 300 mm (4 3/4" x 11 13/16")
<b>Gable profile:</b>	120 x 150 mm (4 3/4" x 5 7/8")
<b>Gable profile:</b>	120 x 200 mm (4 3/4" x 7 7/8")
<b>Center Gable profile:</b>	120 x 250 mm (4 3/4" x 9 13/16")
<b>Ridge &amp; eave purlin:</b>	100 x 140 mm (3 15/16" x 5 1/2")
<b>Intermediate purlin:</b>	80 x 80 mm (3 1/8" x 3 1/8")
<b>Roof slope:</b>	18 degrees